

ETC-SV15


Catalytic air treatment



TECHNICAL SPECIFICATION

› Flow rate at 7 barg / 100 psig	15 Nm ³ /min	530 scfm
› Max. pressure	16 barg	232 psig
› Air quality for oil according to ISO 8573-1	class 0 (< 0.0025 mg/Nm ³)	
› Weight approx.	770 kg	1700 lbs
› Power supply	400 VAC, 3 ph, 50 Hz	
› Installed power	10 kW	
› power consumption	0.005 kWh/Nm ³	

››› Dimensions

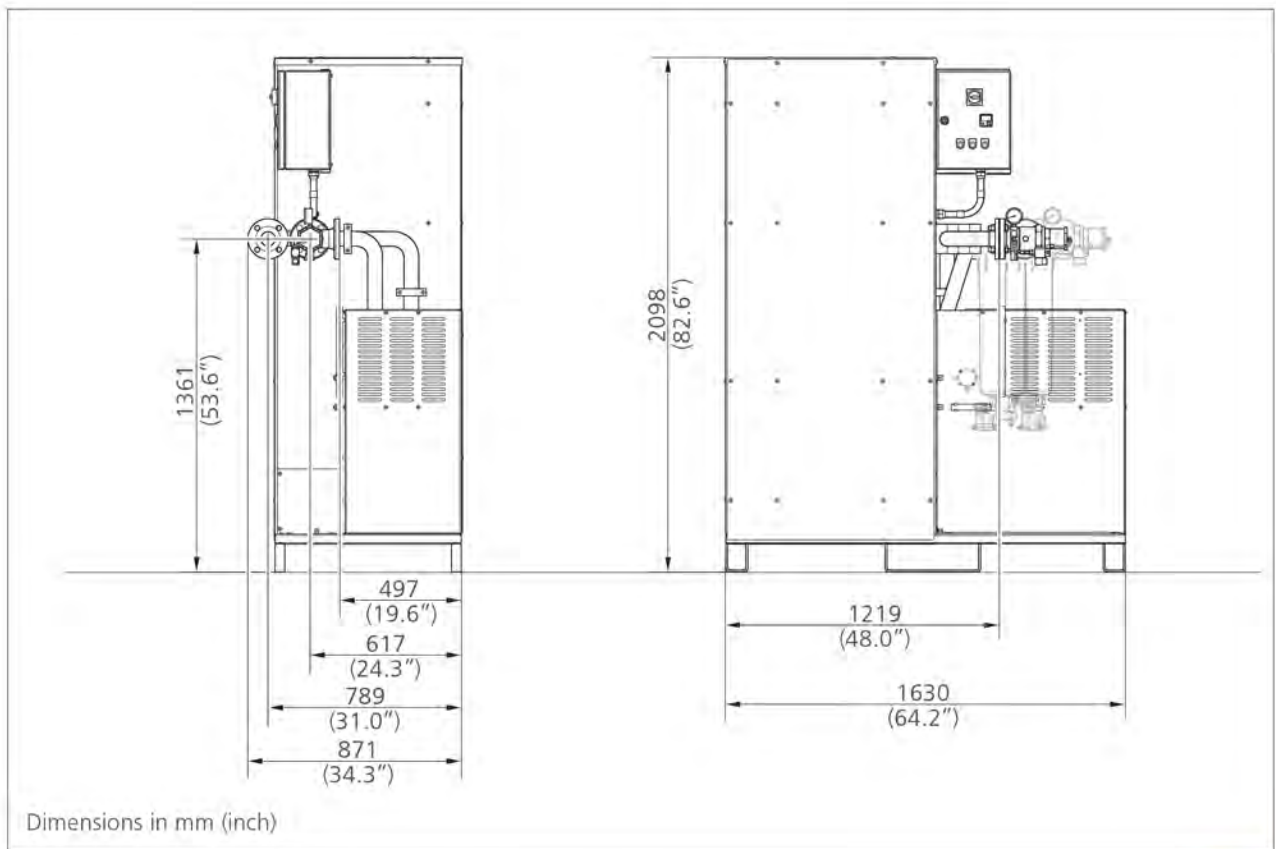

Without separator, VS-module and particle filter.
For detailed layout, please ask for the installation drawing/3d model.




»»» Design data

Permissible deviations from the design data for guaranteed oil-free air class 0 according to DIN ISO 8573-1

	Operating pressure		Nominal flow rate* 100%		Flow rate range without VS module* 70% – 110%		Flow rate range with VS module* 20% – 110%	
	[barg]	[psig]	[Nm ³ /min]	[scfm]	[Nm ³ /min]	[scfm]	[Nm ³ /min]	[scfm]
	5	72.5	11.3	397	7.9 - 12.4	278 - 437	2.3 - 12.4	79 - 437
	6	87.0	13.1	463	9.2 - 14.4	324 - 510	2.6 - 14.4	93 - 510
Design point	7	101.5	15.0	530	10.5 - 16.5	371 - 583	3.0 - 16.5	106 - 583
	8	116.0	16.9	596	11.8 - 18.6	417 - 655	3.4 - 18.6	119 - 655
	9	130.5	18.8	662	13.1 - 20.6	463 - 728	3.8 - 20.6	132 - 728
	10	145.0	20.6	728	14.4 - 22.7	510 - 801	4.1 - 22.7	146 - 801
	11	159.5	22.5	794	15.8 - 24.8	556 - 874	4.5 - 24.8	159 - 874
	12	174.0	24.4	861	17.1 - 26.8	602 - 947	4.9 - 26.8	172 - 947

* Normal flow rate according to DIN ISO 13431
Pressures greater than 12 barg are available on request

»»» Design chart

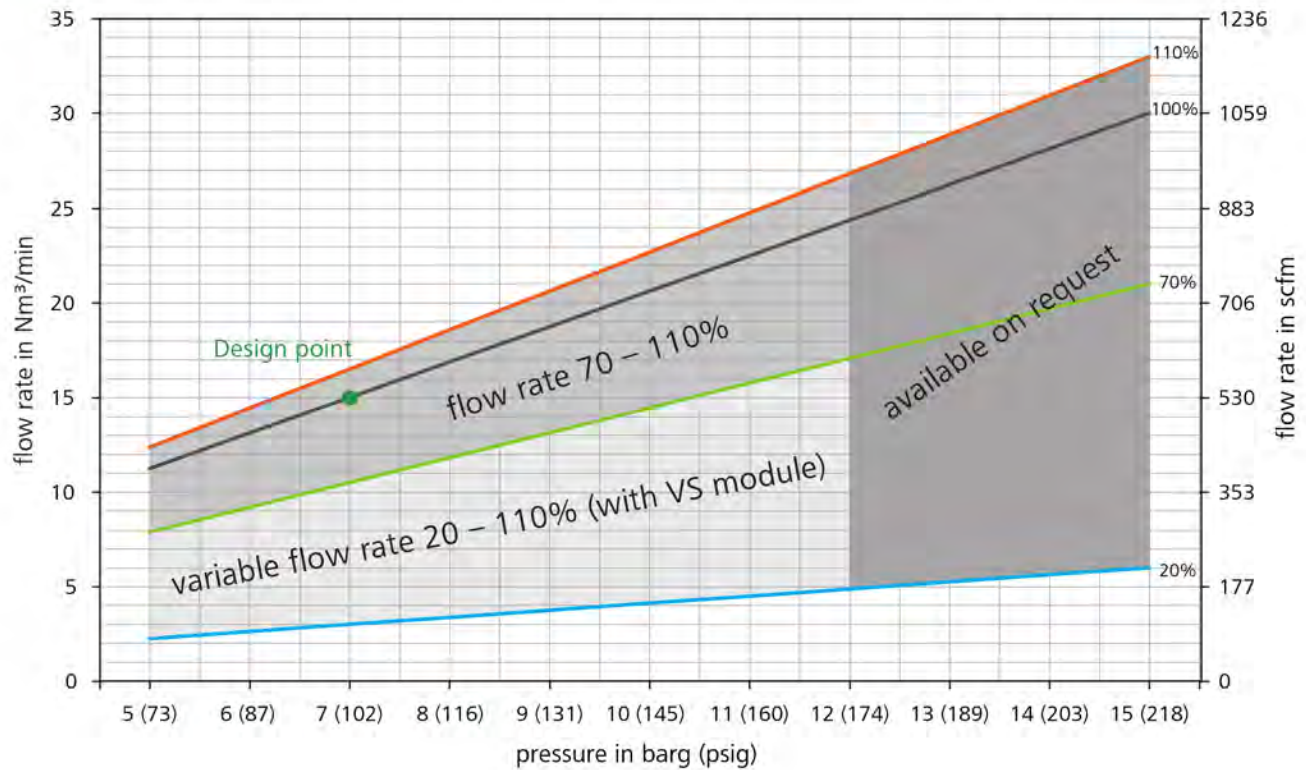

www.dvsystems.ca

As we are continually trying to improve our products, specifications are subject to change without notice.
©DV Systems Inc. 2011

DV SYSTEMS INC. 490 Welham Rd. Barrie Ontario L4N 8Z4 Phone: 705 728-5657 • Fax: 705 728-4974