

ETC-SV2


Catalytic air treatment



TECHNICAL SPECIFICATION

› Flow rate at 7 barg / 100 psig	2 Nm ³ /min	71 scfm
› Max. pressure	16 barg	232 psig
› Air quality for oil according to ISO 8573-1	class 0 (< 0.0025 mg/Nm ³)	
› Weight approx.	160 kg	350 lbs
› Power supply	230 VAC, 1 ph, 50 Hz	
› Installed power	2.5 kW	
› power consumption	0.009 kWh/Nm ³	

››› Dimensions

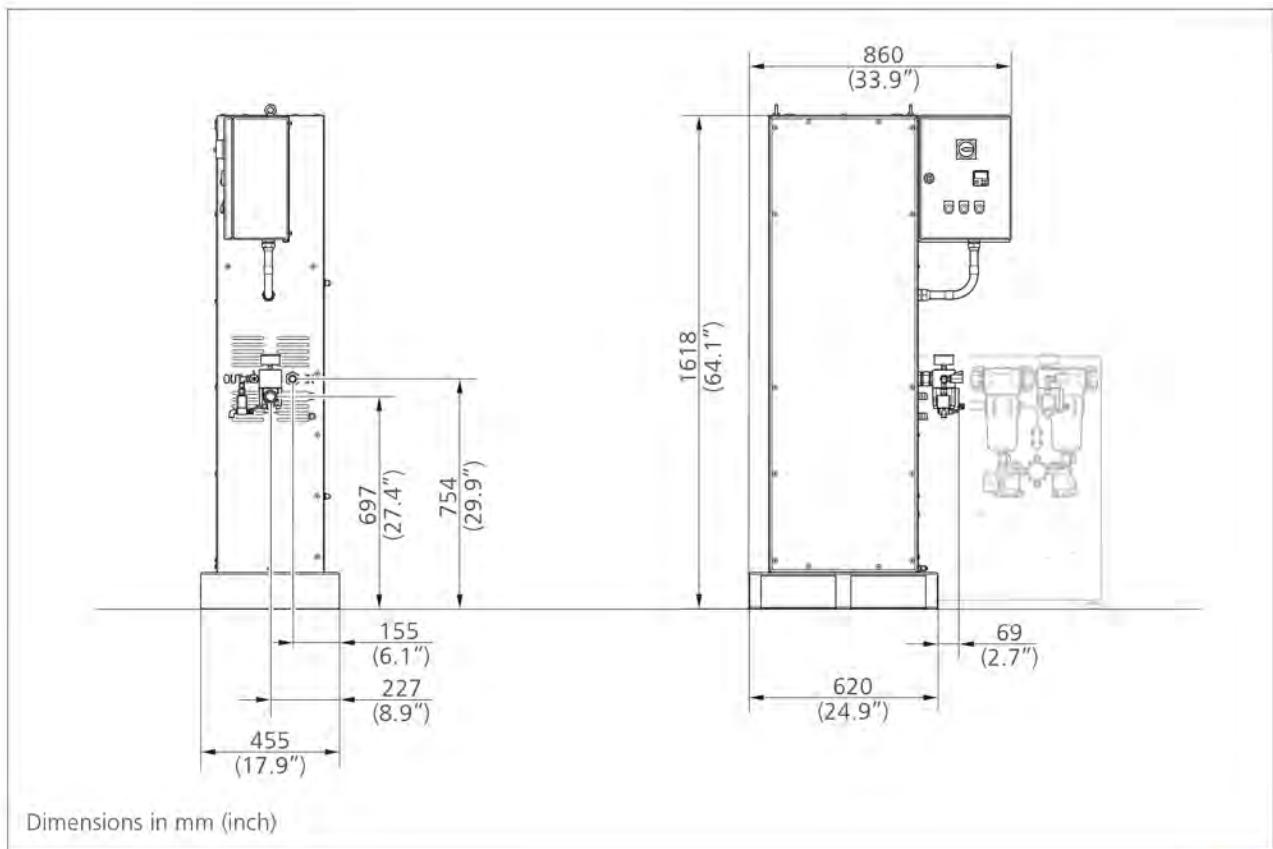

Without separator, VS-module and particle filter.
For detailed layout, please ask for the installation drawing/3d model.




»»» Design data

Permissible deviations from the design data for guaranteed oil-free air class 0 according to DIN ISO 8573-1

	Operating pressure		Nominal flow rate* 100%		Flow rate range without VS module* 70% – 110%		Flow rate range with VS module* 20% – 110%	
	[barg]	[psig]	[Nm ³ /min]	[scfm]	[Nm ³ /min]	[scfm]	[Nm ³ /min]	[scfm]
	5	72.5	1.50	53	1.05 - 1.65	37 - 58	0.30 - 1.65	11 - 58
	6	87.0	1.75	62	1.23 - 1.93	43 - 68	0.35 - 1.93	12 - 68
Design point	7	101.5	2.00	71	1.40 - 2.20	49 - 78	0.40 - 2.20	14 - 78
	8	116.0	2.25	79	1.58 - 2.48	56 - 87	0.45 - 2.48	16 - 87
	9	130.5	2.50	88	1.75 - 2.75	62 - 97	0.50 - 2.75	18 - 97
	10	145.0	2.75	97	1.93 - 3.03	68 - 107	0.55 - 3.03	19 - 107
	11	159.5	3.00	106	2.10 - 3.30	74 - 117	0.60 - 3.30	21 - 117
	12	174.0	3.25	115	2.28 - 3.58	80 - 126	0.65 - 3.58	23 - 126

* Normal flow rate according to DIN ISO 13431
Pressures greater than 12 barg are available on request

»»» Design chart

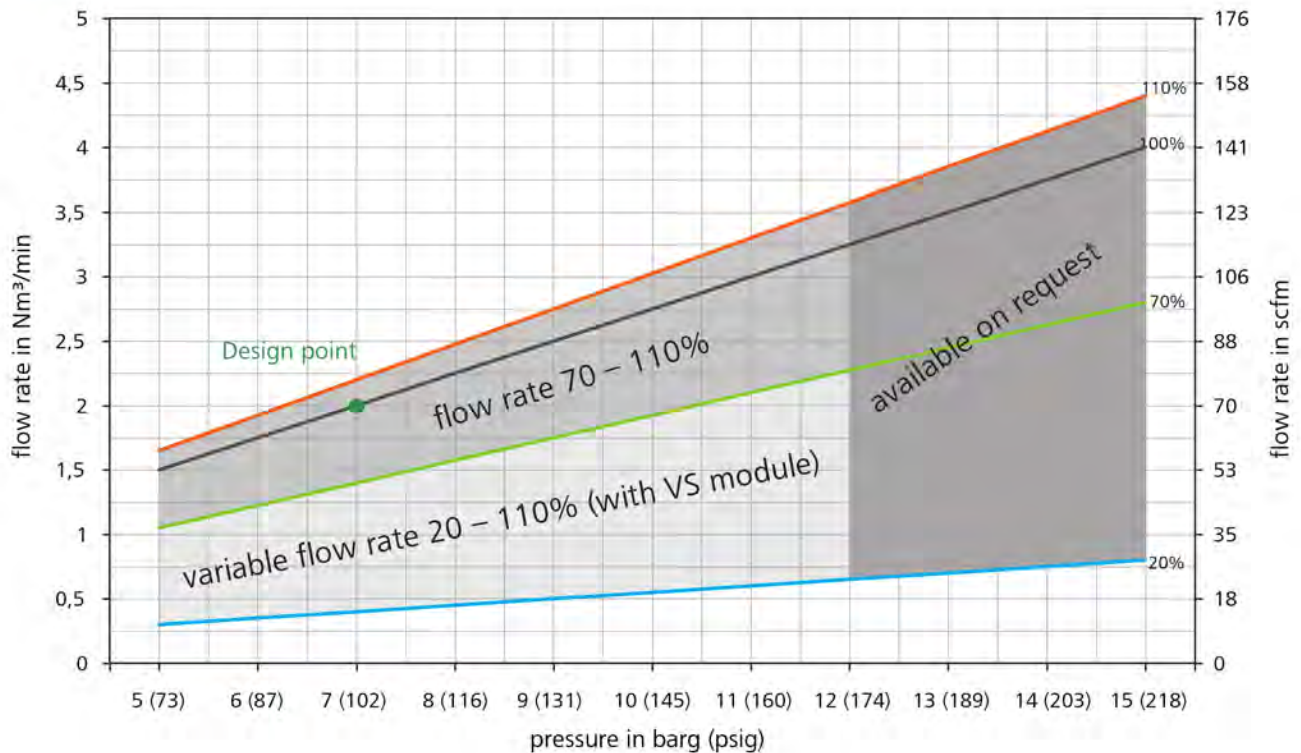

www.dvsystems.ca

As we are continually trying to improve our products, specifications are subject to change without notice.
©DV Systems Inc. 2011

DV SYSTEMS INC. 490 Welham Rd. Barrie Ontario L4N 8Z4 Phone: 705 728-5657 • Fax: 705 728-4974